

VCL65SH

Silicone Rubber Sheetting Electrically Conductive

Material


Electrically Conductive Silicone Rubber Sheetting

Available Grades

915mm wide, 65° shore A, black, thicknesses 0.5mm – 6.35mm

Other variations available on request

Temperature Range

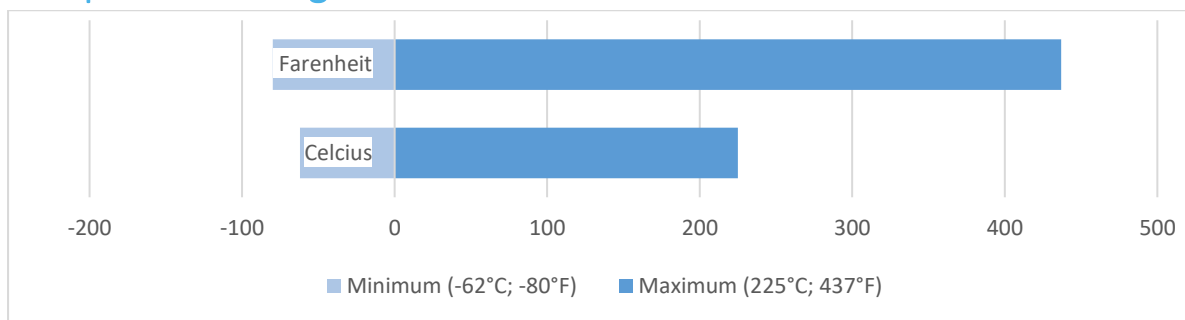

Specifications

Silex Electrically conductive grade silicone sheetting is designed to be used in many different applications. It is a carbon black filled silicone material that will act as a low amperage conductor and will also provide protection against electrostatic discharge.

This material is available in continuous rolls or sheets. It is resistant to extreme high and low temperatures and is proven to be an excellent gasketing material. Black is the only colour available.

Environmental Resistance

Silicone Rubber Products have an excellent resistance to:

- Ozone
- Oxidation
- Ultraviolet Light
- Corona Discharge
- Cosmic radiation
- Ionising radiation
- Weathering in general

This information and our technical advice, whether verbal, in writing or by way of trials, is given in good faith. Recommendations for use do not constitute a warranty, either express or implied, of the fitness or suitability of the product for a particular purpose. This also applies where proprietary rights are involved. Our advice does not release you from the obligations to check its validity and to test our products as to their suitability for their intended use. The storage, application and use of our products are beyond our control and, therefore, entirely your own responsibility. The information contained within this data sheet is subject to change without notice.


Viking Extrusions Ltd – Ivy Arch Road, Worthing, West Sussex, BN14 8BX, UK

Company Number: 2634482UK

VAT Number: GB587651394

Registered in England & Wales

REV 01 – Last Updated: 13/06/24

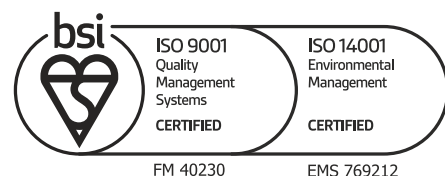

VCL65SH

Silicone Rubber Sheetting Electrically Conductive

Typical Applications

- Electrically conductive gaskets
- Ignition gaskets
- Band electrodes
- Applications where electrical conductivity and RFI/EMI shielding, or antistatic qualities are required.[]

Material Properties

Properties	Units	Typical Value	Test Method
Specific Gravity	g/cm ³	1.17	ASTM D297
Durometer	Shore A	65 ± 5	ASTM D2240
Tensile Strength	MPa (psi)	5.2 (774)	ASTM D412
Elongation	%	260	ASTM D412
Compression Set (70 hrs at 150°C / 25%)	%	26	ASTM D395
Tear Strength	KN/m (ppi)	8 (46)	ASTM D624
Electrical Conductivity	Ω·cm	5	ASTM D991

These figures are only intended as a guide and should not be used in preparing specifications.

General Characteristics

- Surface finish: glossy smooth

This information and our technical advice, whether verbal, in writing or by way of trials, is given in good faith. Recommendations for use do not constitute a warranty, either express or implied, of the fitness or suitability of the product for a particular purpose. This also applies where proprietary rights are involved. Our advice does not release you from the obligations to check its validity and to test our products as to their suitability for their intended use. The storage, application and use of our products are beyond our control and, therefore, entirely your own responsibility. The information contained within this data sheet is subject to change without notice.

Viking Extrusions Ltd – Ivy Arch Road, Worthing, West Sussex, BN14 8BX, UK

Company Number: 2634482UK

VAT Number: GB587651394

Registered in England & Wales

REV 01 – Last Updated: 13/06/24

